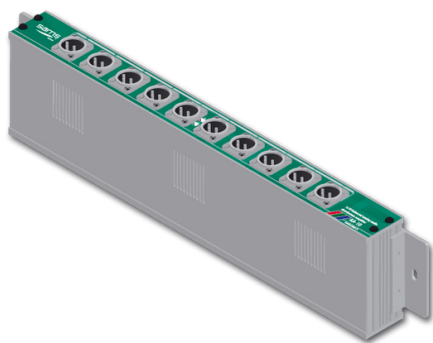


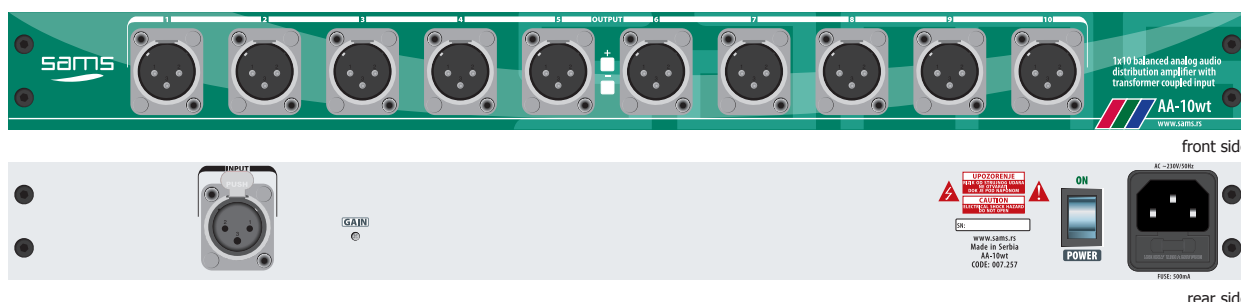
AA-10wt

1ch analog audio distribution amplifier 1x10
with transformer coupled input, pro series for
wall mount



- High quality
- 10 outputs
- Low noise (100dB S/N)
- Gain range -6dB to +6dB
- Individual buffer outputs
- Available in 66Ω or 600Ω output impedance
- Transformer coupled input

Series of audio distribution amplifiers have excellent isolation from crosstalk between channels and it has provided individual amplifiers for each output. The device have installed a transformer at the entrance. Distribution automatically adjusts for unbalanced output. The device is mounted vertically on a wall.

**TECHNICAL SPECIFICATIONS**

Specifications and designs are subject to change without notice

GENERAL INFORMATION

- Code:007.257
- Weight: 2 Kg
- Type: 1RU rack frame
- Dimensions: 1RU x 19" x 100mm
- Delivery includes: device, power corde, user manual

INPUT

- Number: 1
- Connector: XLR
- Impedance: > 40KΩ, balanced

OUTPUT

- Number: 10
- Connector: XLR
- Impedance: 600Ω or 66Ω
- Max output level: + 24/16dBu (600Ω)

PERFORMANCE

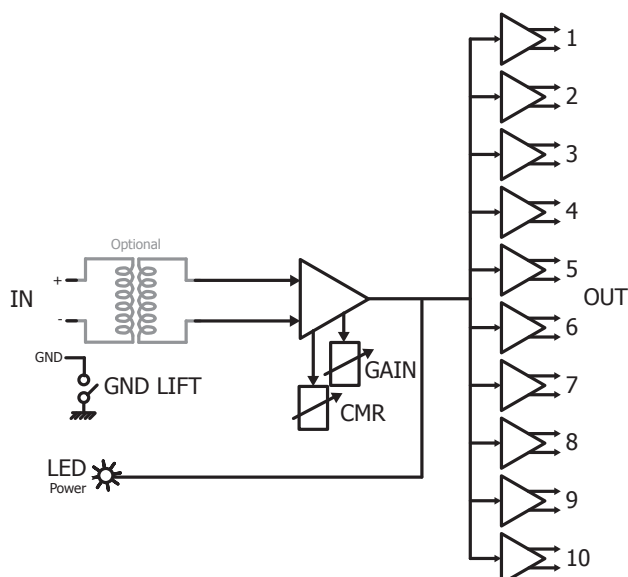
- Gain: -6dB do +6dB
- Frequency response: < ± 0.1dB (20Hz to 20KHz)
- S/N ratio: > 100dB unity gain 20Hz to 20KHz
- TDH: 0.1% at 20Hz to 20KHz
- Inter channel cross talk: > 90dB at 20Hz to 20KHz

POWER

- Voltage: ~230V AC ± 10%
- Power: 30W
- Frequency: 50Hz
- Overload protection: front Mounted Circuit Breaker

TEMPERATURE

- Performance: 5-40°C
- Operating: 0-50°C

BLOCK DIAGRAM**ORDERING INFORMATION**

Code	Name	Description
007.257	AA-10wt	1CH audio DA (transformer) 1x10