


CP-16

Slave remote control panel 16x1

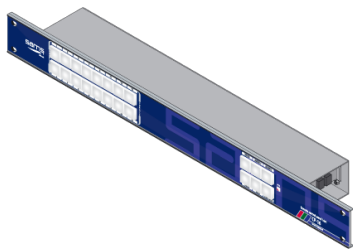

- Link to the master control via RS-485 port
- Easy setup
- Separate routing of audio and video
- Separate routing of audio channels
- Undo function by destination and level
- Locking of individual connections
- Return to the previous state due to power failure
- IP 67 keys with a minimum of 5 million switching

Slave control CP-16 is used in separate studios, where control of multiple destinations is not needed. Remotes makes easy to control the matrix. As well as master remote, slave control can control three-level switching, with "undo" button to return to the previous state and can be locked. Destination can easily be assigned to remote using keys on master remote. Slave control is connected to the master via RS-485 serial port.



front side

TECHNICAL SPECIFICATIONS

Specifications and designs are subject to change without notice

GENERAL INFORMATION

- Code:003.904
- Weight: 1.5 Kg
- Type: 1RU rack frame
- Dimensions: 1RU x 19" x 70mm
- Required: remote control CP-1616, cable for connection with remote control
- Delivery includes: device

TEMPERATURE

- Performance: 5-40°C
- Operating: 0-50°C

ORDERING INFORMATION

Code	Name	Description
003.904	CP-16	Remote control 16x1