



## Master remote control for 16x4 routers

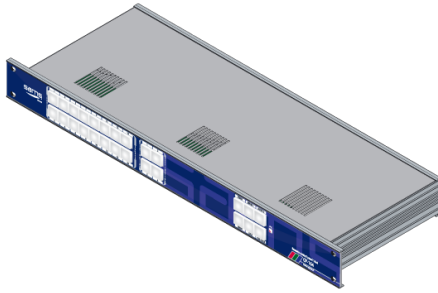

- Standard RS-485 port
- Easy to use
- Easy configuration
- Separate routing of audio and video
- Separate routing of audio channels
- Undo function by destination and level
- Locking of individual connections
- Power down memory recovery
- IP 67 keys with a minimum of 5 million switching
- Ability to add slave remote controls

Remote control CP-164 allows easy operation on routing switchers. Control allow independent control of three-level switching. It also have a "undo" button to return to the previous state for all three levels independently and allow individual locking the desired destination, as well as locking the entire panel. The simple way to assign destinations from the master to slave controls through key presses (detailed explanations in user guide). Communication with the matrix is via RS-485 serial port and with PC via RS-232. As Master remote control, it have the option of assigning an router output to slave control. The maximum number of slave controls is 2.

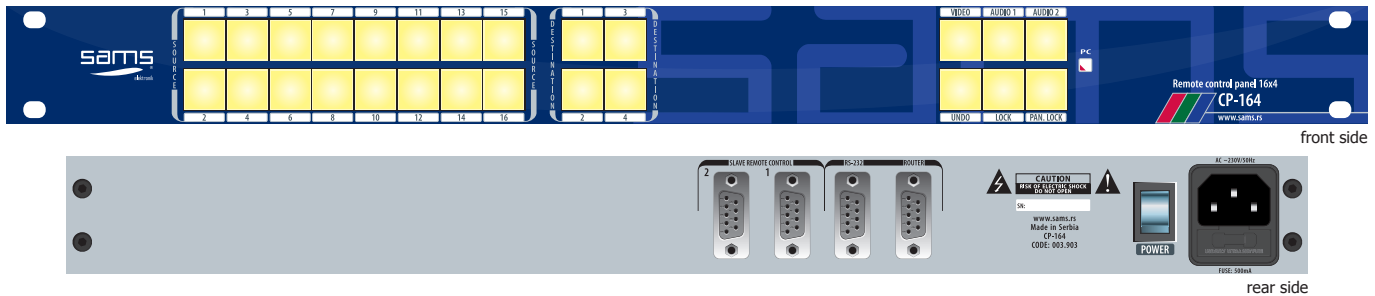

## TECHNICAL SPECIFICATIONS

Specifications and designs are subject to change without notice

### GENERAL INFORMATION

- Code: .....003.903
- Weight: ..... 2 Kg
- Type: ..... 1RU rack frame
- Dimensions: ..... 1RU x 19" x 200mm
- Required: ..adequate routing switcher, connection cable with routing switcher
- Delivery includes:..... device, power corde

### POWER

- Voltage: ..... ~230V AC  $\pm$  10%
- Power: ..... 30W
- Frequency: ..... 50Hz
- Overload protection: ..... front Mounted Circuit Breaker

### TEMPERATURE

- Performance: ..... 5-40°C
- Operating: ..... 0-50°C

## ORDERING INFORMATION

| Code    | Name   | Description         |
|---------|--------|---------------------|
| 003.903 | CP-164 | Remote control 16x4 |