


CP-3232

Master remote control for 32x32 routers

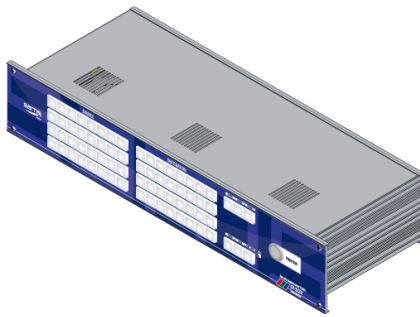


- Standard RS-485 port
- Easy to use
- Easy configuration
- Separate routing of audio and video
- Separate routing of audio channels
- Undo function by destination and level
- Locking of individual connections
- Power down memory recovery
- IP 67 keys with a minimum of 5 million switching
- Ability to add slave remote controls

Remote control CP-3232 allows easy operation on routing switchers. Control allow independent control of three-level switching. It also have a "undo" button to return to the previous state for all three levels independently and allow individual locking the desired destination, as well as locking the entire panel. Remote control have a special PC software through which you can reconfigure any key inputs and outputs in additional commands and it can control even the smart data matrix in the configuration of the video - 2ch audio - data. Communication with the matrix is via RS-485 serial port and with PC via RS-232. As Master remote control, it have the option of assigning an router output to slave control. The maximum number of slave controls is 16.



front side

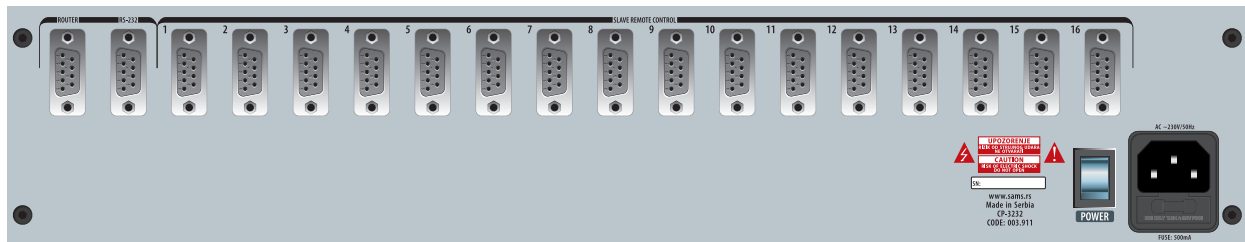

rear side

TECHNICAL SPECIFICATIONS

Specifications and designs are subject to change without notice

GENERAL INFORMATION

- Code:003.911
- Weight: 3 Kg
- Type: 2RU rack frame
- Dimensions: 2RU x 19" x 200mm
- Required: ..adequate routing switcher, connection cable with routing switcher
- Delivery includes:..... device, power corde

POWER

- Voltage: ~230V AC \pm 10%
- Power: 30W
- Frequency: 50Hz
- Overload protection: front Mounted Circuit Breaker

TEMPERATURE

- Performance: 5-40°C
- Operating: 0-50°C

ORDERING INFORMATION

| Code | Name | Description |
|---------|---------|----------------------|
| 003.911 | CP-3232 | Remote control 32x32 |